

Chime & Siren
PE-6103



Chime & Siren

PE-6103



- **MULTIPLE TONES**

- A variety of soft tones are available for your announcements, including two-tone, chime up and chime down.

- **SIREN**

- Both steady and variable levels of siren tones are available for emergency announcements.

- **REMOTE CONTROL CAPABILITY**

- Rear-panel terminals are provided for connecting a wired remote control to increase functionality.

FRONT/REAR PANEL



- 1 CHIME SWITCHES
- 2 WAVING SIREN SWITCH


- 3 FLAT SIREN SWITCH
- 4 OFF SWITCH




- 1 DC INPUT TERMINALS
- 2 OUTPUT JACK

- 3 REMOTE CONTROL TERMINAL

APPLICATIONS

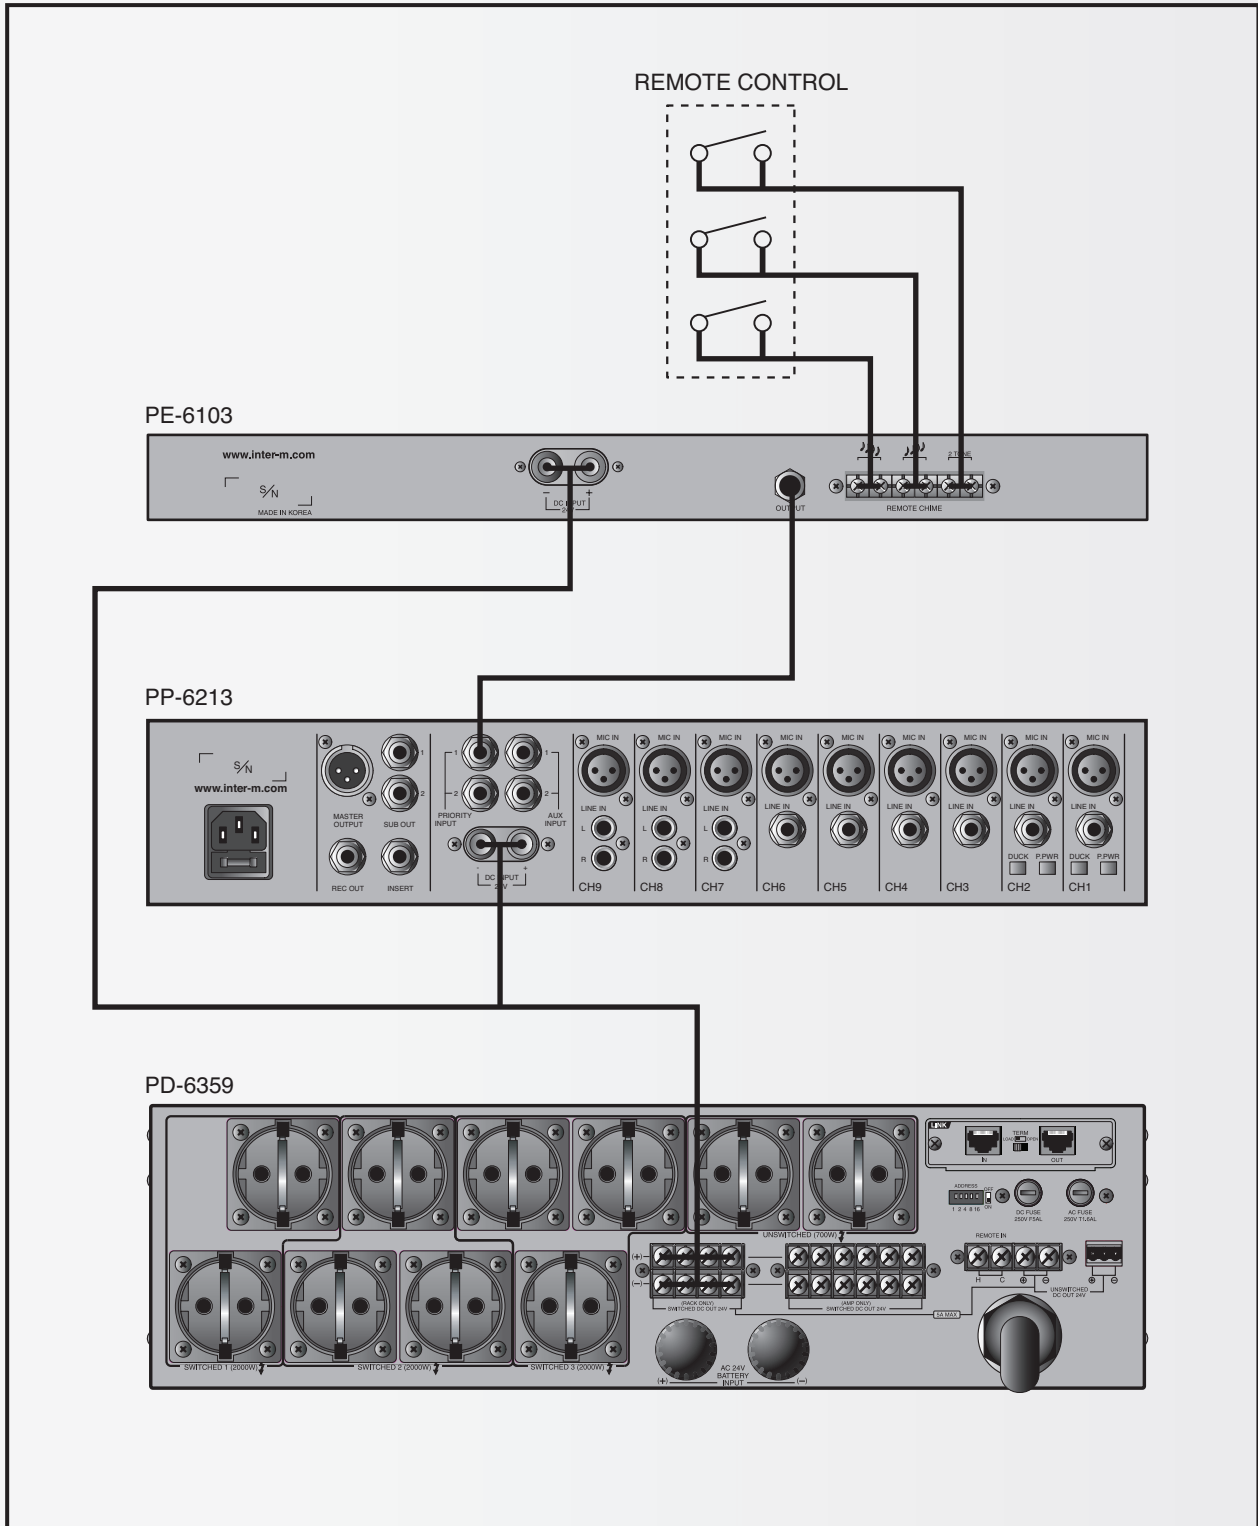


BLOCK DIAGRAM

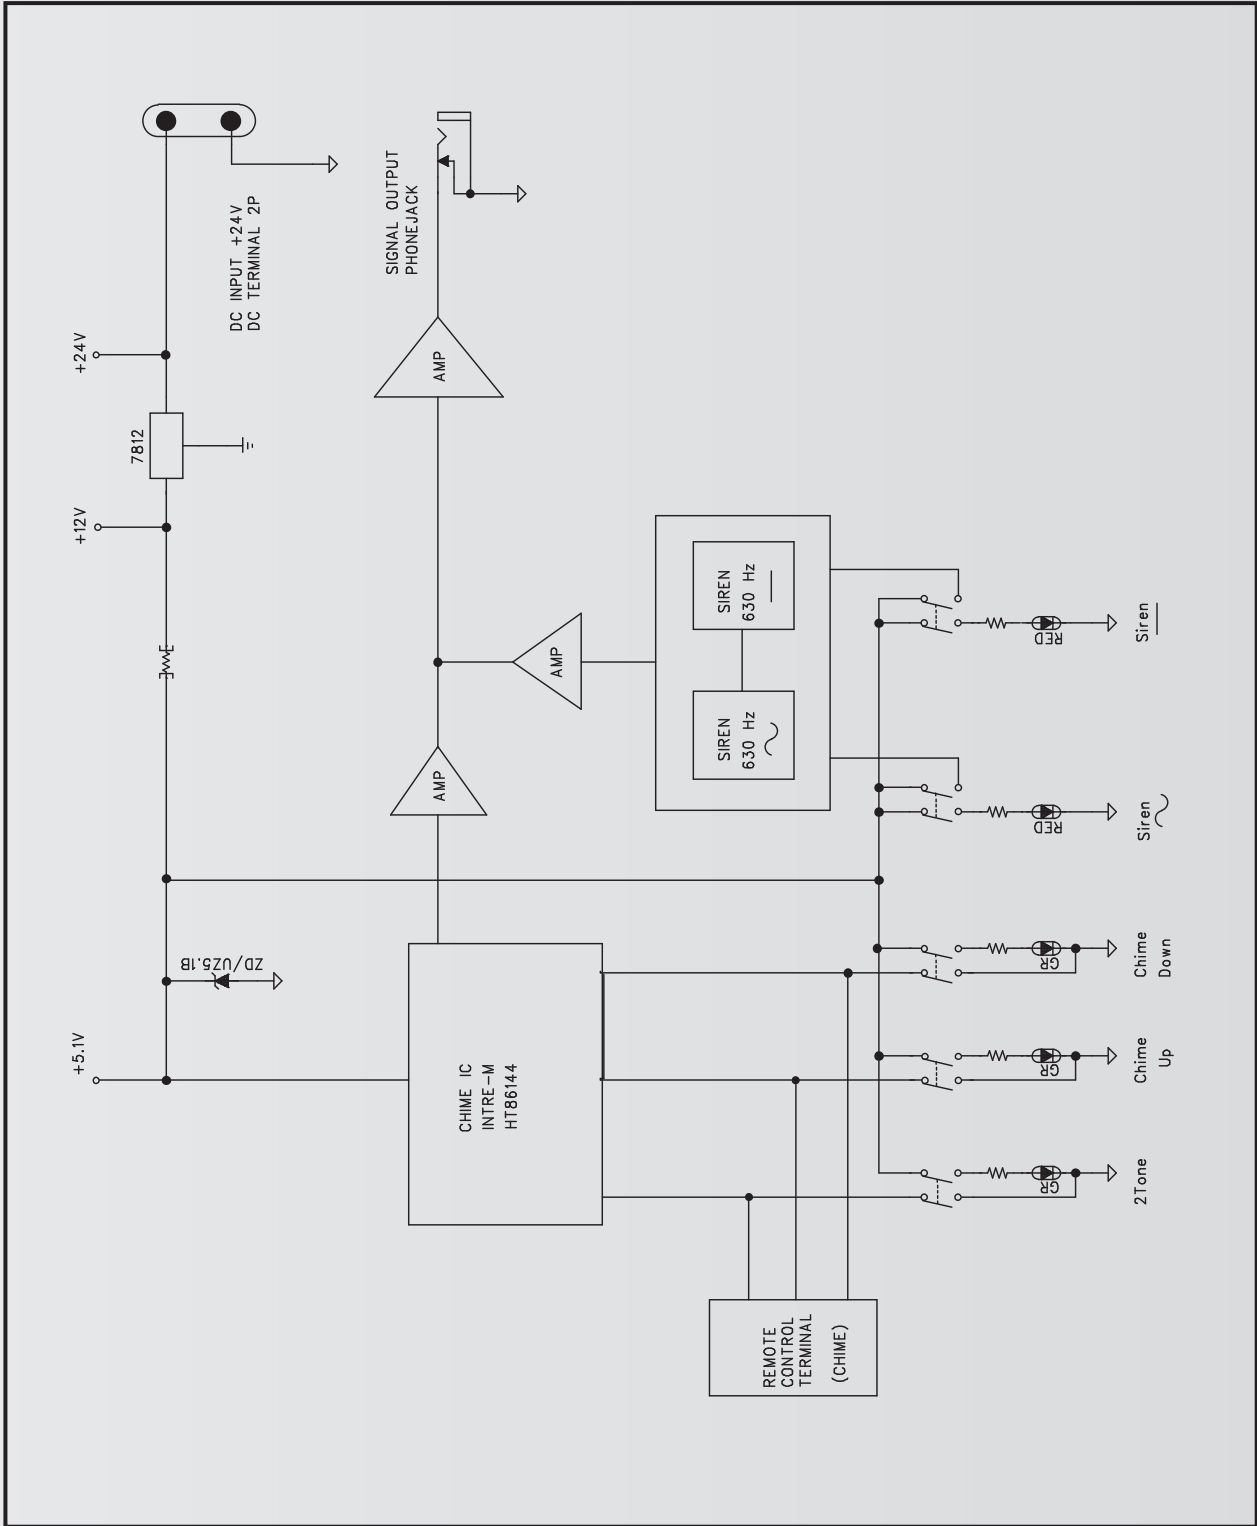

SPECIFICATIONS

	PE-6103
Siren Frequency	630 Hz
Chime and Siren Output Level/Impedance	1Vrms/10kΩ Unbalanced
Operation Temperature	-10°C ~ +40°C / 140°F~104°F
Power Source	24V DC
Power Consumption	60mA
Weight (SET)	2.8kg/6.2lb
Dimensions (SET)	482(W)x44(H)x280(D)mm/19(W)x1.7(H)x11(D)in

DIMENSIONS

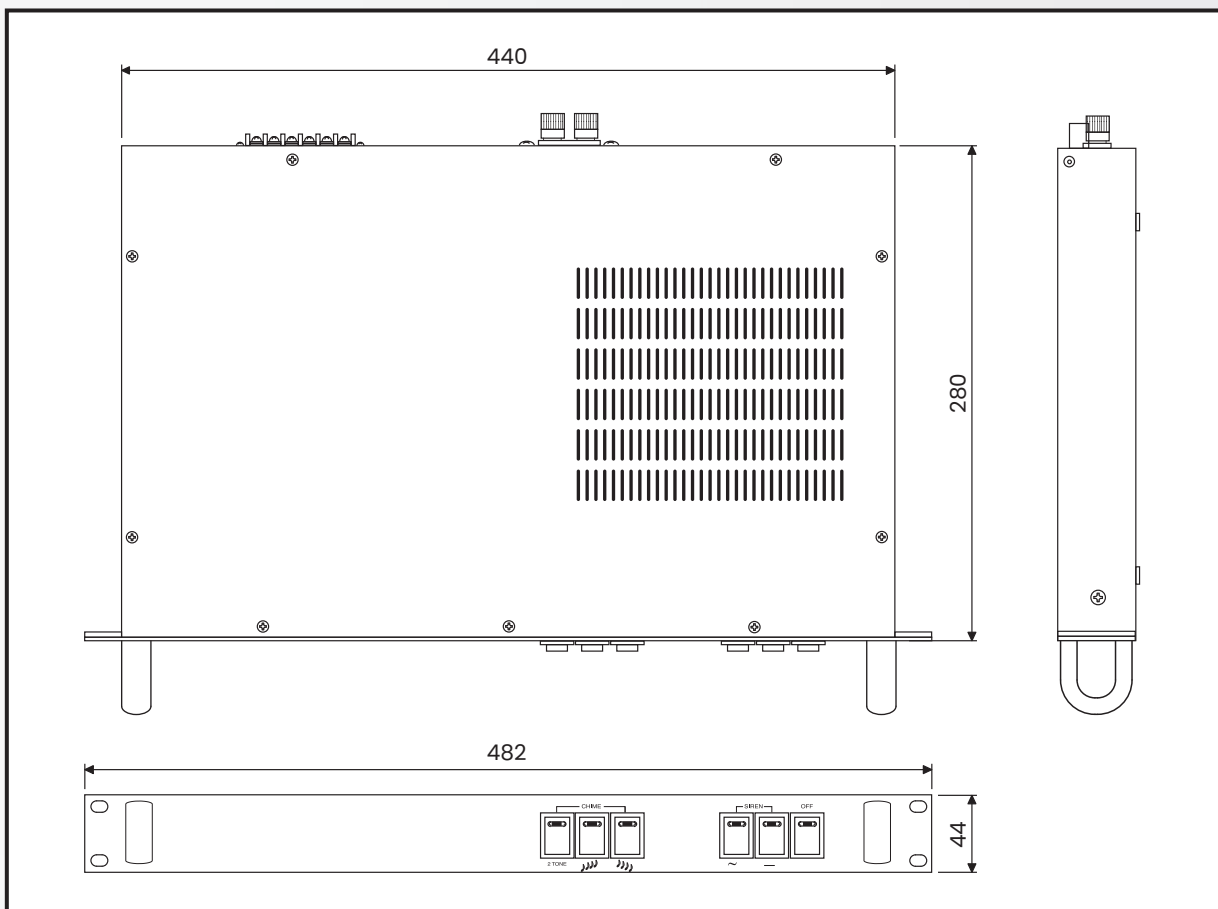



RED OFFICE SUPPLIES LIMITED

📍 Eastern Commercial Complex, 73 Kakrail, 7th Floor,
Suite#12, Ramna, Dhaka-1000, Bangladesh

☎ 09614 61 61 61 ✉ info@redoffice.com.bd

🌐 www.redoffice.com.bd