

Wall Speaker

WS-203/210/230



FEATURES

- ✦ Using high quality sound source unit
- ✦ Favorable exterior design
- ✦ Convenience for installation
- ✦ WS-203/210 : 1-way SPK system(adapt SUB-CONE, 6" Full range)
- ✦ WS-230 : 2-way SPK system(adapt DOME tweeter, 6"-2 way)
- ✦ High reliability
- ✦ Interior Speaker

SPECIFICATIONS


Model		WS-203	WS-210	WS-230
Unit			6.5"	
Power Handling (AES)		3W	10W	30W
Input Power	100V	3W/2W/1W	10W/5W/3W	30W/20W/10W
	70V	-	-	-
Impedance	100V	3.3kΩ/5kΩ/10kΩ	1kΩ/2kΩ/3.3kΩ	330Ω/500Ω/1kΩ
	70V	-	-	-
	LOW	-	-	-
Frequency Range (-20%)		123Hz~20kHz	84Hz~20kHz	99Hz~20kHz
Sensitivity (1W/1m)		87dB	87dB	89dB
Maximum SPL [Cont]		91dB	96dB	103dB
Nominal Dispersion (HxV)	1kHz	140° x 190°	130° x 190°	140° x 190°
	4kHz	40° x 50°	40° x 40°	50° x 50°
Weight (Net)		1.1kg / 2.42lb	1.2kg / 2.64lb	2.2kg / 4.85lb
Dimensions (Net, WxHxD)		315 x 183 x 103mm 12.4 x 7.2 x 4.1in	315 x 183 x 103mm 12.4 x 7.2 x 4.1in	315 x 183 x 124mm 12.4 x 7.2 x 4.9in

* Design and specification are subject to be changed for the improvement of product quality without pre notice.




FREQUENCY RESPONSE


► WS-203

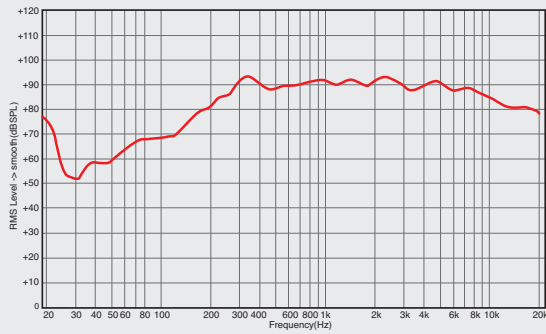

► WS-210

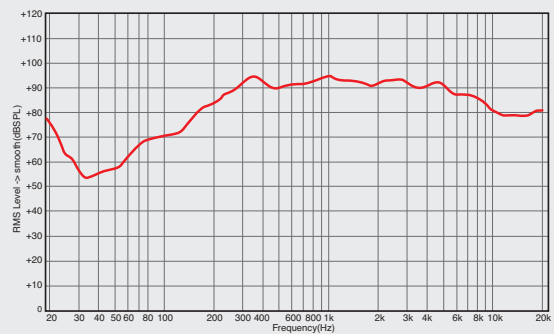

► WS-230

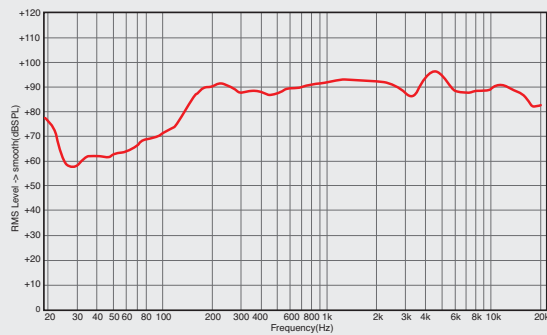



RED OFFICE SUPPLIES LIMITED

📍 Eastern Commercial Complex, 73 Kakrail, 7th Floor,
Suite#12, Ramna, Dhaka-1000, Bangladesh

☎ 09614 61 61 61 ✉ info@redoffice.com.bd

🌐 www.redoffice.com.bd